



Wood · Stone

7.25" x 48"(184mm x 1219mm)

$\frac{\nabla}{\triangle}$ 2mm

$\frac{=}{\nabla}$ 0.3mm

UV coating

▲ Size



▲ WS-611




▲ WS-612



▲ WS-613



▲ WS-614

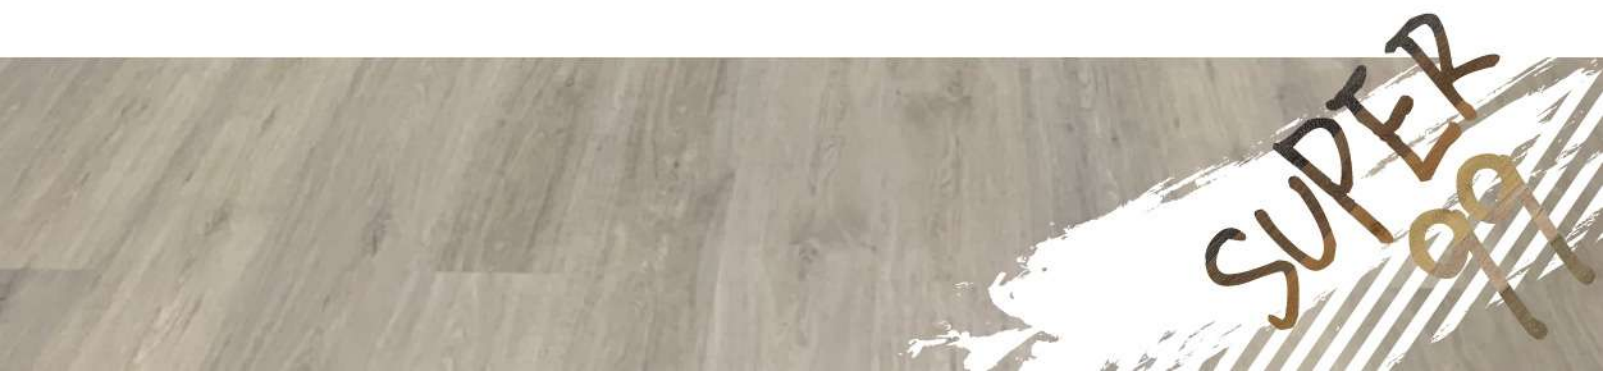

7.25" x 48"(184mm x 1219mm)

$\frac{\nabla}{\triangle} 2\text{mm}$

$\frac{=}{\nabla} 0.3\text{mm}$

UV coating

▲ Size



▲ WS-615




▲ WS-616



▲ WS-617



▲ WS-618

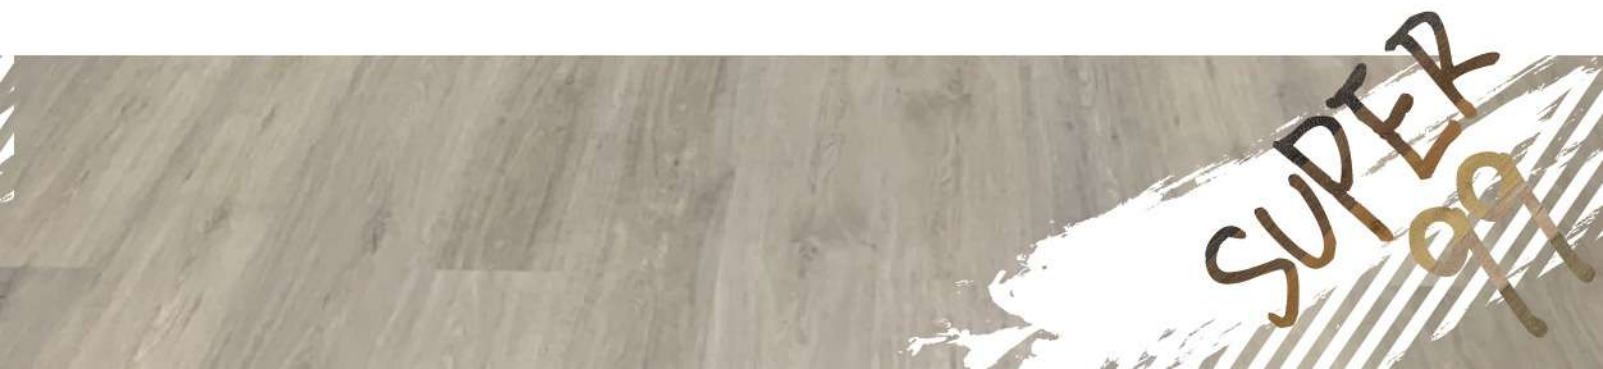

7.25" x 48"(184mm x 1219mm)

$\frac{\nabla}{\triangle}$ 2mm

$\frac{=}{\triangle}$ 0.3mm

UV coating

▲ Size



▲ WS-619




▲ WS-620



▲ WS-621



▲ WS-622

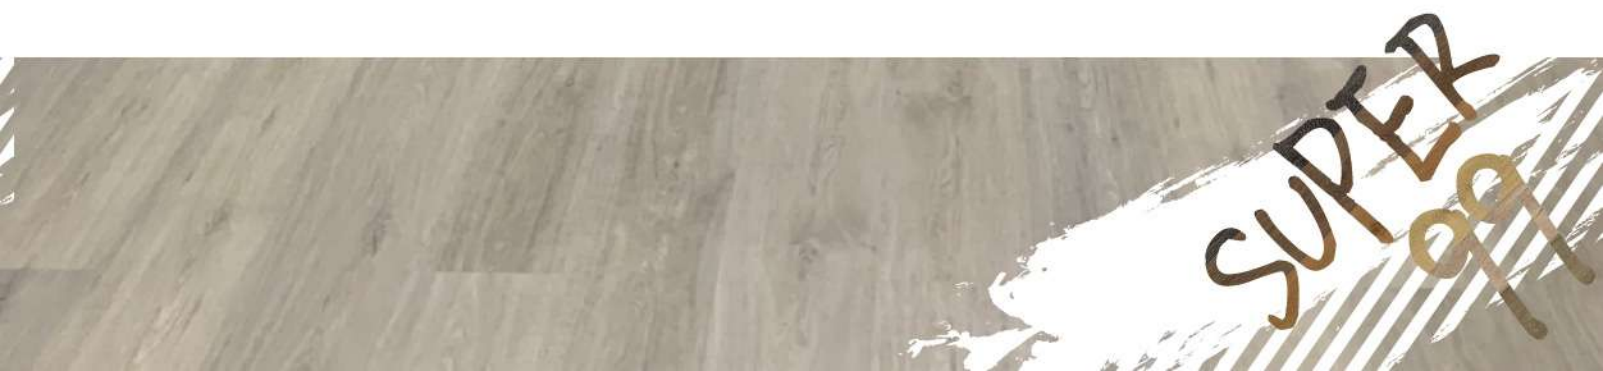

18" x 24"(457mm x 609mm)

$\frac{\nabla}{\triangle}$ 2mm

$\frac{=}{\nabla}$ 0.3mm

UV coating

▲ Size



▲ WS-301



▲ WS-302



▲ WS-303



▲ WS-304

SUPER
991

18" x 24"(457mm x 609mm)

$\frac{\nabla}{\triangle}$ 2mm

$\frac{=}{\nabla}$ 0.3mm

UV coating

▲ Size



▲ WS-305



▲ WS-306



▲ WS-307



▲ WS-308



Series	Size	Coating	Packing
Wood	7.25"x48"(184mmx1219mm)	UV	15pcs/carton
Stone	18"x24"(457mmx609mm)	UV	12pcs/carton
Test Item	Test method		Test report
重金屬含量測試	Migration of certain elements	EN 71 Part 3	PASS
耐腳輪測試	Castor Chair Resistance	EN ISO 4918	PASS
直角度測試	Edge straightness	EN ISO 24342	0.02mm~0.07mm
直線度測試	Side length	EN ISO 24342	0.03mm~0.10mm
整體厚度測試	Overall thickness	EN ISO 24346	±0.10mm
耐磨層厚度測試	Thickness of layers	EN ISO 24340	±0.02mm
單位面積重量測試	Mass per unit area	EN ISO 23997	3550g/m ²
殘餘壓痕測試	Residual Indentation	EN ISO 24343	0.04mm
尺寸穩定性	Dimensional Stability	ISO 23999	0.08%
翹曲度測試	Curling	ISO 23999	0.05mm
柔韌性測試	Flexibility and deflection	EN ISO 24344	PASS
防焰阻燃測試	Fire Rating	EN 13501-1	B _n -s1
防滑性能測試	Slip Resistance	EN 13893 / EN 14041	Level DS
色牢度測試	Colour Fastness To Light	ISO 105-B02	Above Grade 6
甲醛含量測試	Formaldehyde Release	EN 14041 / EN 717-1	E1
香菸燒灼測試	Burning cigarettes	EN 1399	Level 2
五氯苯酚含量測試	Essential characteristics(PCP)	EN 14041 / EN 12673	PASS
導熱測試	Thermal Conductivity	EN 12667	0.121W/(m·K)
耐熱測試	Thermal Resistance	EN 12667	0.041(m ² ·K)/W
危險物質釋放量測試	Reach SVHC	GZTC CHEM-TOP-092	PASS
鄰苯二甲酸鹽	Phthalates	EN 14372	PASS
揮發性有機化合物	French VOC Regulation	ISO 16000 parts -3,-6,-9,-11	A+
性能等級分類	Classification	EN ISO 10874	23,31



Non-abrasive



Resistant to stains



Hygienic and easily maintained



Impact resistant



Light fastness, Grade 6 as per EN 20105



Resistant to household chemicals



Resistant to burning



Healthy and ecologically

